

# Mini Tools



## Vertical Inserts and Toolholders for threading, chamfering, grooving and turning

### Advantages

**Carbide grade:**

BLU-Sub-Micron grade with advanced PVD triple layer coating delivering high heat resistance and smooth cutting operation.

- Carbide shank toolholder provides excellent vibration resistance.
- Long reach.
- Through coolant.
- For threading, grooving, boring and chamfering.
- Quick indexing.

### Typical Applications:

- Long threads or applications requiring over-hang.
- Enables production of threads with large pitch/profile.
- Threading, grooving, boring, profiling and chamfering - It's possible to offer most of the Tiny Tools profiles on the insert.

**Contents:**


Page:

**Contents:**

Page:


Product Identification	106	Full Radius Grooving	110
Partial Profile 60°	107	Back Turning	110
Partial Profile 55°	107	Face Grooving	111
ISO	108	Face Grooving Full Radius	112
UN	108	Carbide Shank Toolholder	113
Chamfering	109	Steel Toolholders	113
Grooving	109	Technical Section	114

# Product Identification

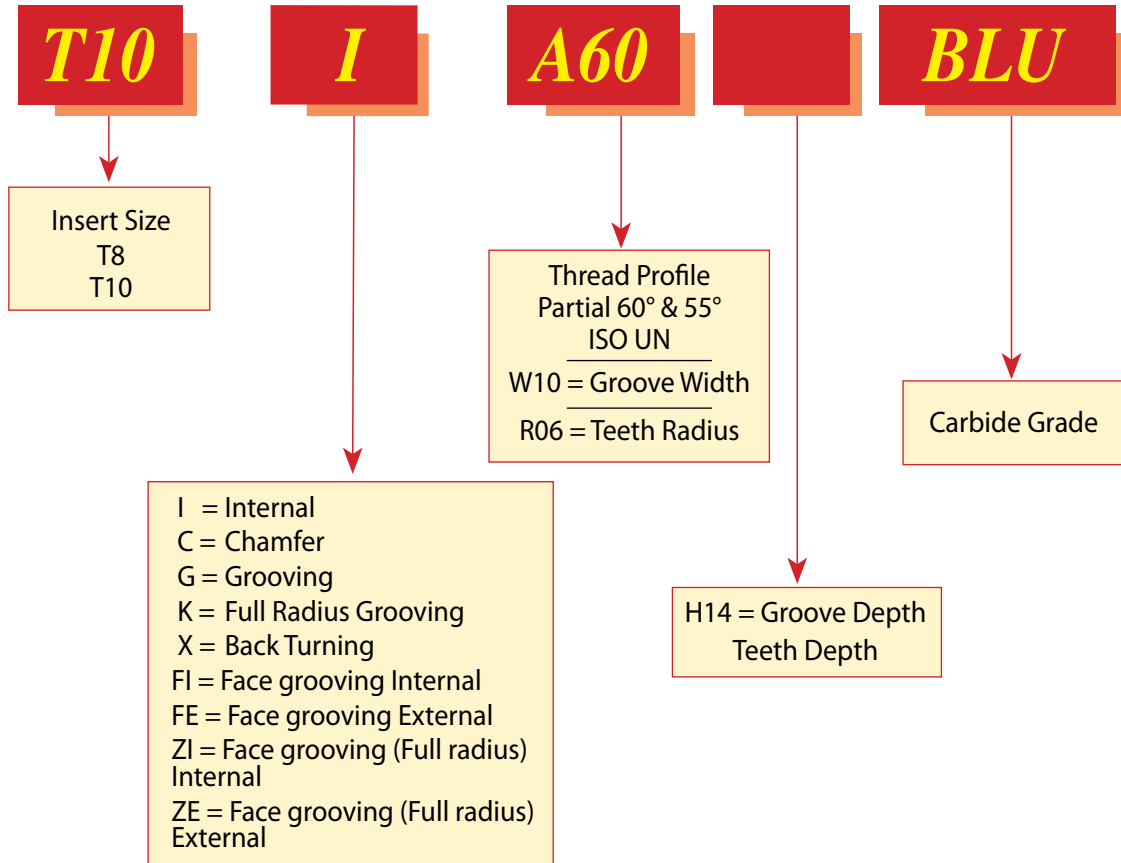

## Partial Profile 60°

Same insert for internal and external thread

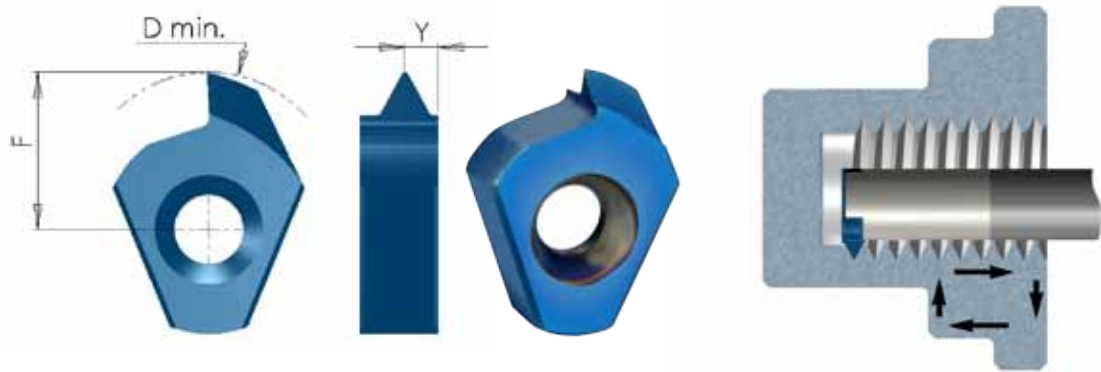


Insert Type	Ordering Code	Pitch Range mm	Pitch Range TPI	D min	F	Y
T8	<b>T8 A60</b>	Int 0.5-0.75 Ex 0.4- 0.75	56-32 64-32	8.0	3.7	0.6
	<b>T8 G60</b>	Int 1.0-1.25 Ex 0.8- 1.0	28-20 32-28	8.4	4.1	0.8
T10	<b>T10 A60</b>	Int 0.5-0.8 Ex 0.4-0.8	56-28 64-32	11.6	6.4	0.6
	<b>T10 G60</b>	Int 1.0-2.0 Ex 0.8-1.75	28-13 32-15	12.3	7.1	1.3
	<b>T10 D60</b>	Int 2.0-3.0 Ex 1.75-2.5	13-8 15-10	13.1	7.9	1.5

## Partial Profile 55°

Same insert for internal and external thread

Insert Type	Ordering Code	Pitch Range mm	Pitch Range TPI	D min	F	Y
T8	<b>T8 G55</b>	1.25-1.5	19-18	9.1	4.8	1.0
	<b>T8 U55</b>	1.75-2.0	16-14	8.7	4.4	1.2
T10	<b>T10 G55</b>	1.25-2.0	19-14	12.4	7.2	1.2

## Full Profile

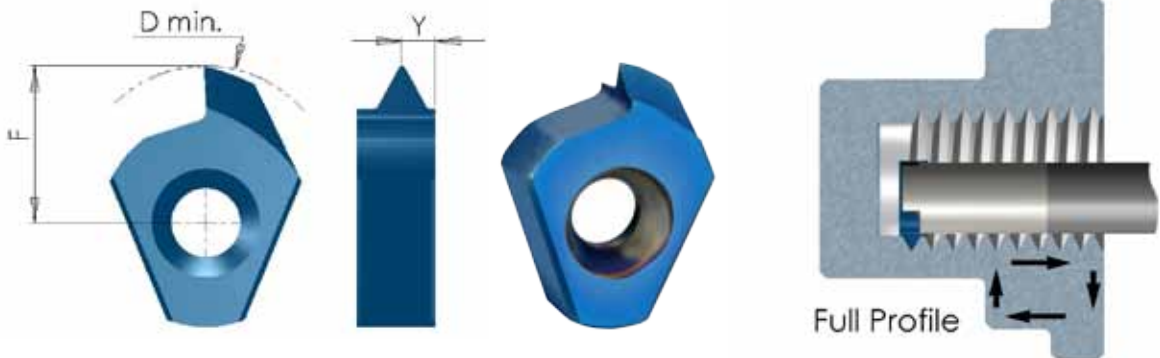

### ISO

Inserts for internal thread


Insert Type	Ordering Code	Pitch mm	M coarse	M fine	D min	F	Y
T8	T8 I 0.5 ISO	0.5		M8.5	8.0	3.6	0.5
	T8 I 0.75 ISO	0.75		M9	8.1	3.8	0.6
	T8 I 1.0 ISO	1.0		M9	8.0	3.7	0.7
	T8 I 1.25 ISO	1.25		M10	8.2	3.9	0.8
	T8 I 1.5 ISO	1.5	M10	M12	8.4	4.1	1.0
	T8 I 1.75 ISO	1.75	M12	-	8.6	4.3	1.1
	T8 I 2.0 ISO	2.0	M14	M17	8.8	4.5	1.3
T10	T10 I 0.5 ISO	0.5		M12	11.3	6.1	0.5
	T10 I 0.75 ISO	0.75		M12	11.3	6.1	0.6
	T10 I 1.0 ISO	1.0		M13	11.7	6.5	0.7
	T10 I 1.5 ISO	1.5		M14	11.7	6.5	1.0
	T10 I 2.0 ISO	2.0	M16	M17	12.0	6.8	1.3
	T10 I 2.5 ISO	2.5	M18, M20	-	12.6	7.4	1.4
	T10 I 3.0 ISO	3.0	M24	M28	12.6	7.4	1.6

### UN

Inserts for internal thread

Insert Type	Ordering Code	Pitch TPI	Nominal size	UNC	UNF	UNEF	D min	F	Y
T8	T8 I 32UN	32	7/16, 1/2			3/8	8.3	4.0	0.6
	T8 I 28UN	28	3/8			7/16, 1/2	8.3	4.0	0.7
	T8 I 24UN	24			3/8		8.3	4.0	0.7
	T8 I 20UN	20	3/8		7/16, 1/2		8.2	3.9	0.9
	T8 I 16UN	16	7/16, 1/2				8.7	4.4	1.0
	T8 I 14UN	14		7/16			8.8	4.5	1.2
T10	T10 I 20UN	20	9/16, 5/8, 11/16			3/4	12.0	6.8	0.9
	T10 I 18UN	18			9/16, 5/8		12.0	6.8	1.0
	T10 I 16UN	16	9/16, 5/8, 11/16		3/4		12.0	6.8	1.1
	T10 I 14UN	14			7/8		12.1	6.9	1.2
	T10 I 12UN	12	5/8, 11/16, 3/4	9/16			12.1	6.9	1.4
	T10 I 11UN	11		5/8			12.5	7.3	1.5


## Chamfering

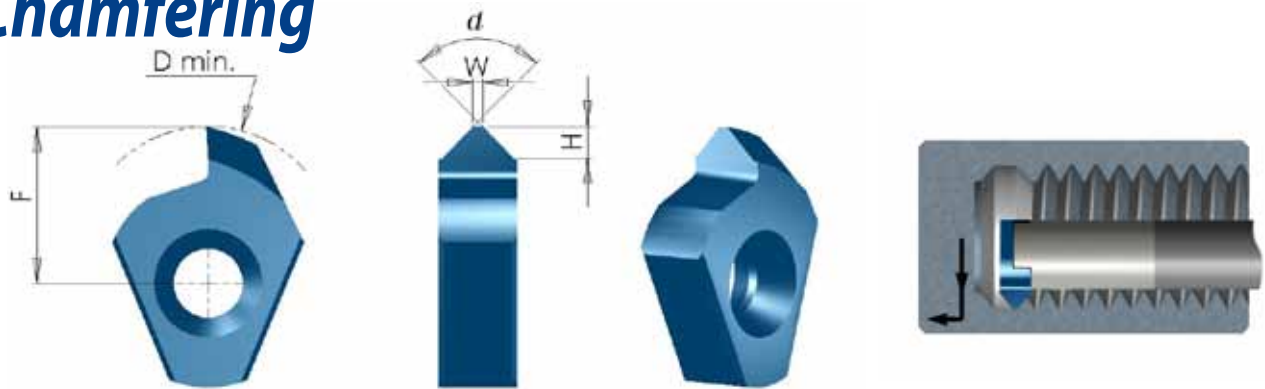

Insert Type	Ordering Code	W	H max	$\alpha$	D min	F
T8	<b>T8 C90</b>	0.2	1.4	90°	8.8	4.5
T10	<b>T10 C90</b>	0.2	1.8	90°	12.7	7.5


Same insert for right and left hand chamfers

## Grooving

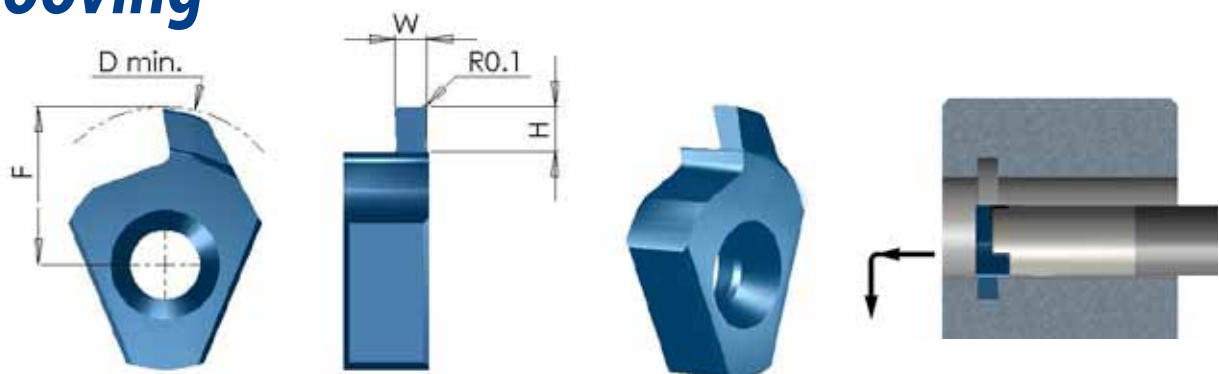


Insert Type	Ordering Code	W $\pm 0.02$	H max	D min	F
T8	<b>T8 G W10 H20</b>	1.0	2.0	9.4	5.1
	<b>T8 G W15 H20</b>	1.5			
	<b>T8 G W20 H20</b>	2.0			
	<b>T8 G W25 H20</b>	2.5			
	<b>T8 G W30 H20</b>	3.0			
T10	<b>T10 G W10 H14</b>	1.0	1.4	12.3	7.1
	<b>T10 G W15 H14</b>	1.5			
	<b>T10 G W20 H14</b>	2.0			
T10	<b>T10 G W10 H23</b>	1.0	2.3	13.1	7.9
	<b>T10 G W15 H23</b>	1.5			
	<b>T10 G W20 H23</b>	2.0			
	<b>T10 G W25 H23</b>	2.5			
	<b>T10 G W30 H23</b>	3.0			

## Full Radius Grooving

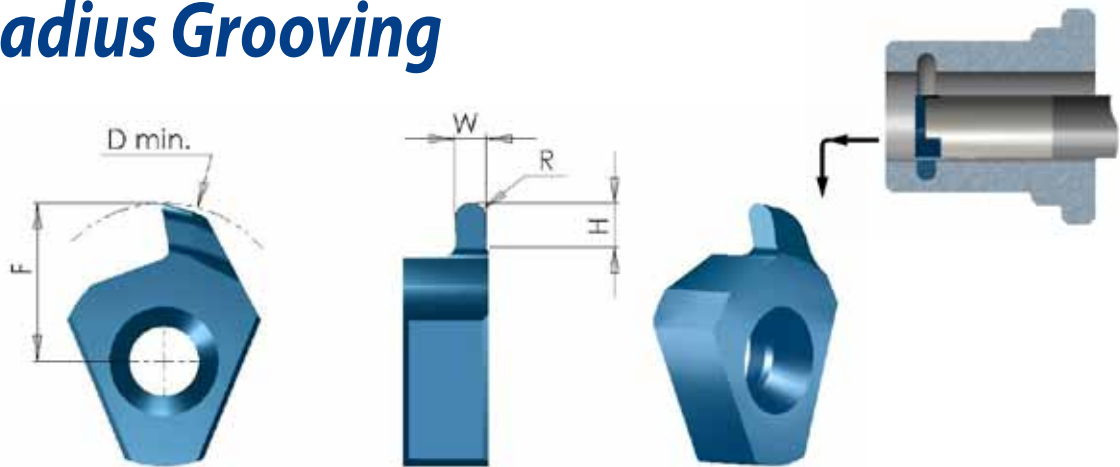


Insert Type	Ordering Code	W ±0.02	R	H max	D min	F
T8	T8 K R04 H10	0.8	0.4	1.0	8.4	4.1
	T8 K R06 H10	1.2	0.6			
	T8 K R09 H10	1.8	0.9			
T10	T10 K R04 H22	0.8	0.4	2.2	13.1	7.9
	T10 K R06 H22	1.2	0.6			
	T10 K R09 H22	1.8	0.9			
	T10 K R10 H22	2.0	1.0			

## Back Turning

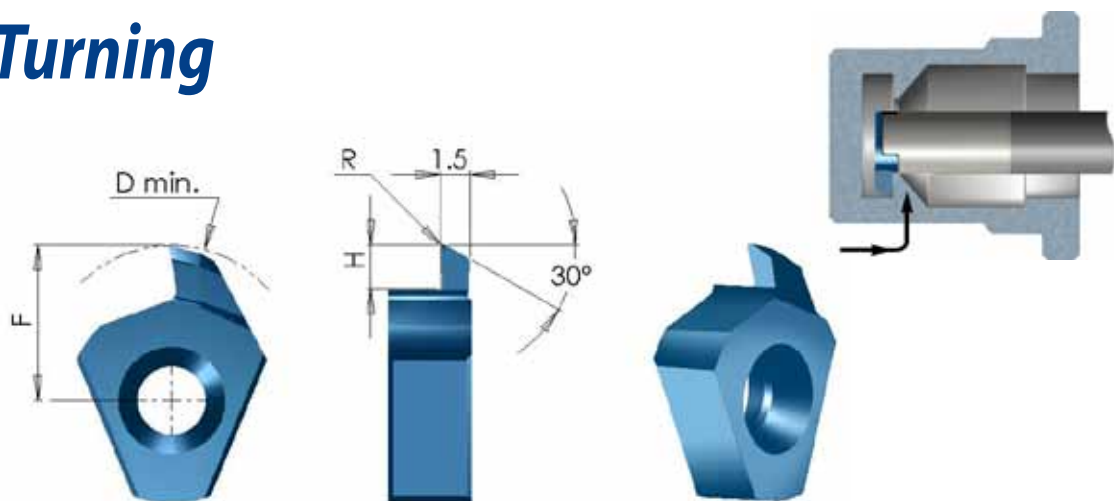


Insert Type	Ordering Code	R	H max	D min	F
T8	T8 X R02 H20	0.2	2.0	9.4	5.1
T10	T10 X R02 H23	0.2	2.3	13.1	7.9
	T10 X R04 H23	0.4			

## Face grooving Internal

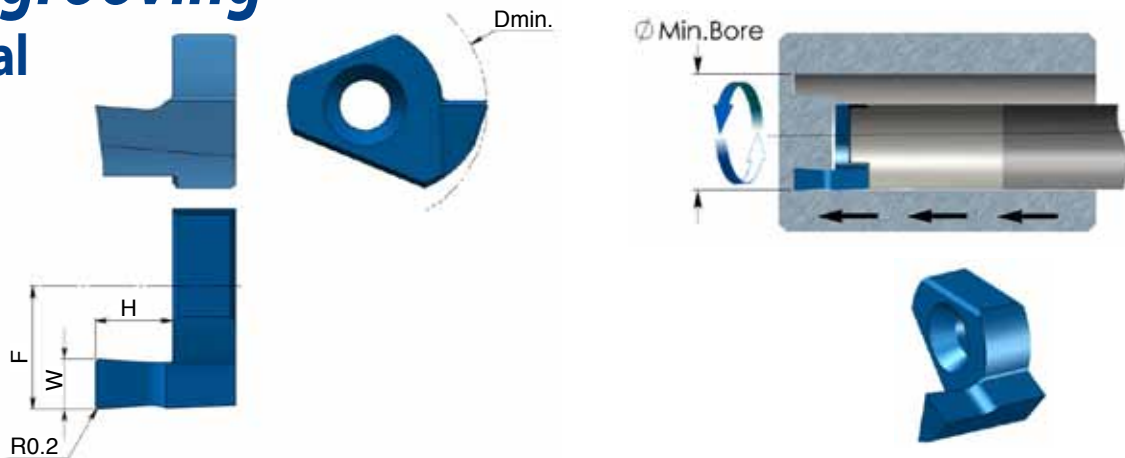


Insert Type	Ordering Code	W ±0.02	H max	D min	F
T10	T10 FI W10 H15	1.0	1.5	14.0	8.0
	T10 FI W15 H25	1.5	2.5		
	T10 FI W20 H30	2.0	3.0		
	T10 FI W20 H50	2.0	5.0		
	T10 FI W25 H30	2.5	3.0		
	T10 FI W25 H50	2.5	5.0		
	T10 FI W30 H30	3.0	3.0		
	T10 FI W30 H50	3.0	5.0		

## External

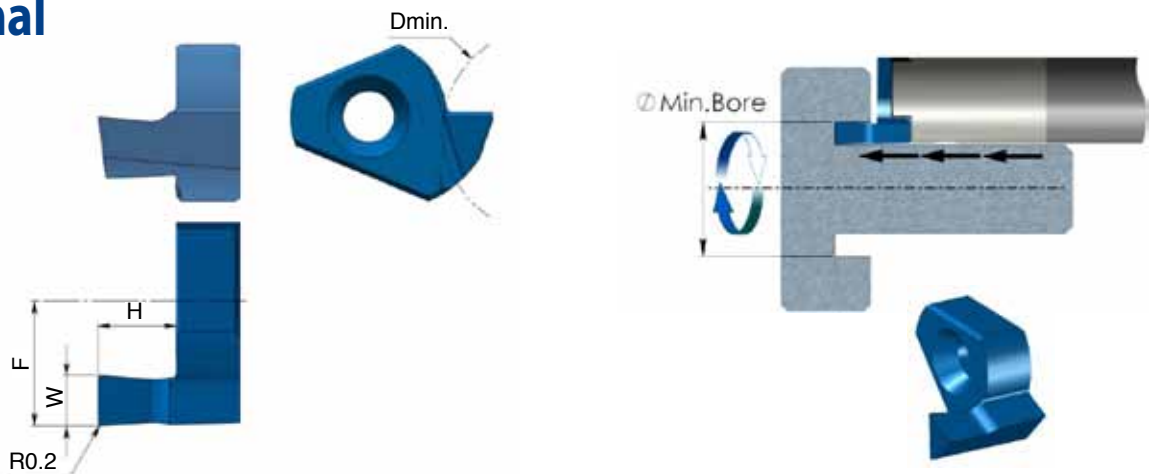


Insert Type	Ordering Code	W ±0.02	H max	D min	F
T10	T10 FE W10 H15	1.0	1.5	12.0	8.0
	T10 FE W15 H25	1.5	2.5		
	T10 FE W20 H30	2.0	3.0		
	T10 FE W20 H50	2.0	5.0		
	T10 FE W25 H30	2.5	3.0		
	T10 FE W25 H50	2.5	5.0		
	T10 FE W30 H30	3.0	3.0		
	T10 FE W30 H50	3.0	5.0		

## Face grooving, Full radius Internal

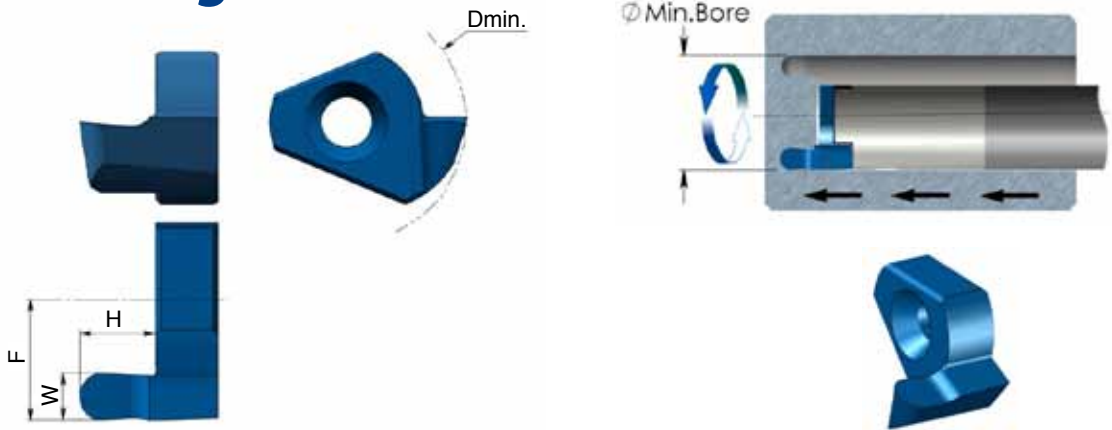

Insert Type	Ordering Code	W ±0.02	R	H max	D min	F
T10	T10 ZI R05 H15	1.0	0.5	1.5	14.0	8.0
	T10 ZI R08 H25	1.6	0.8	2.5		
	T10 ZI R10 H30	2.0	1.0	3.0		
	T10 ZI R125 H30	2.5	1.25	3.0		
	T10 ZI R15 H30	3.0	1.5	3.0		

## External

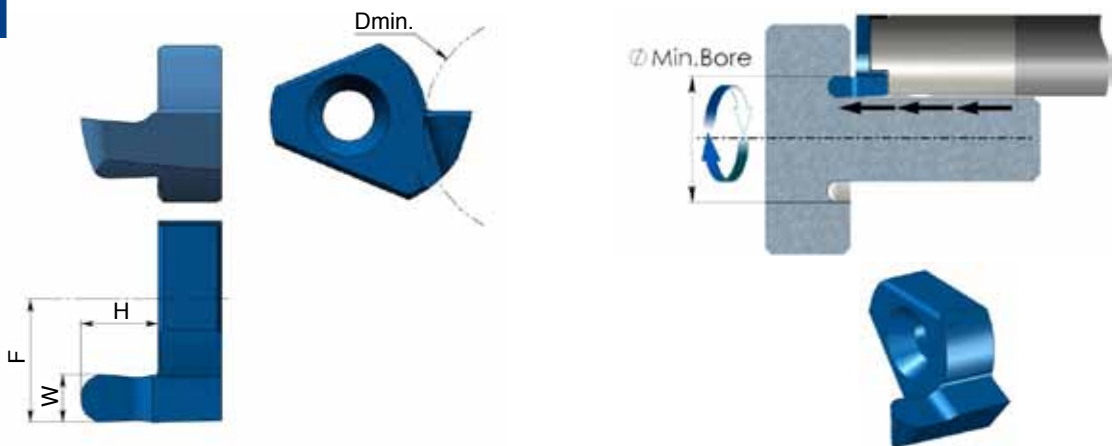


Insert Type	Ordering Code	W ±0.02	R	H max	D min	F
T10	T10 ZE R05 H15	1.0	0.5	1.5	12.0	8.0
	T10 ZE R08 H25	1.6	0.8	2.5		
	T10 ZE R10 H30	2.0	1.0	3.0		
	T10 ZE R125 H30	2.5	1.25	3.0		
	T10 ZE R15 H30	3.0	1.5	3.0		




## Carbide Shank Toolholders

With through coolant

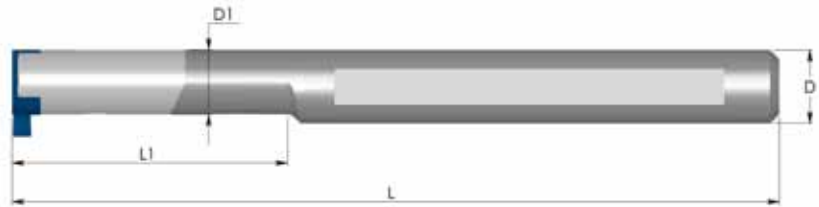

Insert Type	Ordering Code	D	D1	L1	L	Insert Screw	Torx Key
T8	ST 0008 L20 F08C	8	7	20	80	S5	K5
	ST 0008 L30 G08C	8	7	30	95	S5	K5
	ST 0008 L40 H08C	8	7	40	105	S5	K5

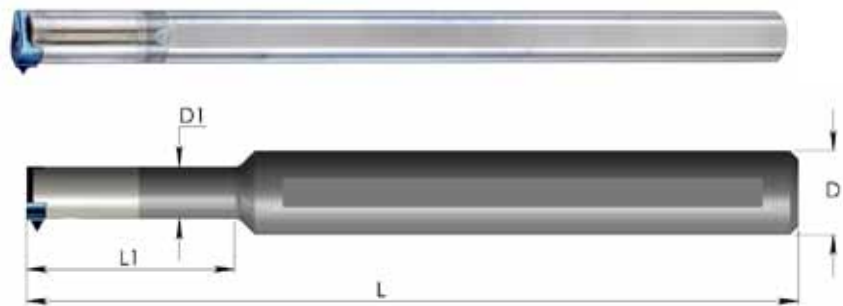

Insert Type	Ordering Code	D	D1	L1	L	Insert Screw	Torx Key
T10	ST 0010 M10C	10	10	-	150	S11	K11
	ST 0012 L40 J10C	12	10	40	110	S11	K11
	ST 0012 L55 K10C	12	10	55	125	S11	K11

## Steel Toolholders

With through coolant



Insert Type	Ordering Code	D	D1	L1	L	Insert Screw	Torx Key
T10	ST 0012 L25 E10	12	10	25	70	S11	K11
	ST 0016 L25 G10	16	10	25	90	S11	K11
	ST 0016 L35 H10	16	10	35	100	S11	K11

## Technical Section

### Cutting Data

ISO	Materials	Cutting Speed m/min	Recommended feed rate mm/rev
<b>P</b>	Low and Medium Carbon Steels <0.55%C	25 - 70	Grooving: 0.01-0.03 Back turning: 0.03-0.10 Face grooving: 0.01-0.08 Chamfering: 0.02-0.08
	High Carbon Steels ≥0.55%C	20 - 50	
	Alloy Steels, Treated Steels	15 - 30	
<b>M</b>	Stainless Steels - Free Cutting	25 - 70	
	Stainless Steels - Austenitic	20 - 40	
	Cast Steels	30 - 70	
<b>K</b>	Cast Iron	15 - 30	
<b>N</b>	Aluminum ≤12%Si, Copper	30 - 90	
	Aluminum >12% Si	20 - 70	
	Synthetics, Duroplastics, Thermoplastics	20 - 70	
<b>S</b>	Nickel Alloys, Titanium Alloys	20 - 50	
<b>H</b>	Hardened Steel 45 - 50HRc	10 - 40	

### Threading Passes

Pitch:	mm	0.5	0.7	0.8	1.0	1.25	1.5	2-5
	TPI	48	36	32	24	20	16	
Number of Passes		6-12	7-14	7-16	8-18	8-20	10-22	20-38