

# Swiss-Line



## Contents:

|                                      |         |
|--------------------------------------|---------|
| Introduction                         | 116     |
| Product Identification - Inserts     | 117     |
| Grooving                             | 118     |
| Grooving and Profiling (full radius) | 119     |
| Parting Off                          | 120-121 |
| Back Turning                         | 122     |
| Front Turning                        | 122     |
| Threading - Partial Profile 60°      | 123     |

## Page:

## Contents:

|  |         |
|--|---------|
| Threading - Partial Profile 55°            | 124     |
| Threading - ISO metric 60°                 | 125     |
| Threading - UN unified 60°                 | 126     |
| Product Identification - Toolholders       | 127     |
| External Toolholders                       | 127-128 |
| Grooving, Parting Off, Turning, Profiling, | 129     |
| Threading, Working Method                  |         |
| Cutting Data                               | 130     |


## Swiss-Line

- Swiss style lathes are becoming a popular alternative to large lathes and machining centers in many companies.
- C.P.T. is introducing Swiss line of inserts and toolholders, developed for automatic and Swiss style lathes.
- Designed for economic production of parting, grooving, profiling and chamfering.

## Advantages


Advanced sub-micron grade (K10-K30) - a combination of strength, toughness, wear resistance and edge sharpness.

- Grounded cutting edges.
- Advanced and unique PVD triple coating, for high wear and heat resistance.
- For most types of material, including Stainless Steels, Titanium and Super Alloys.

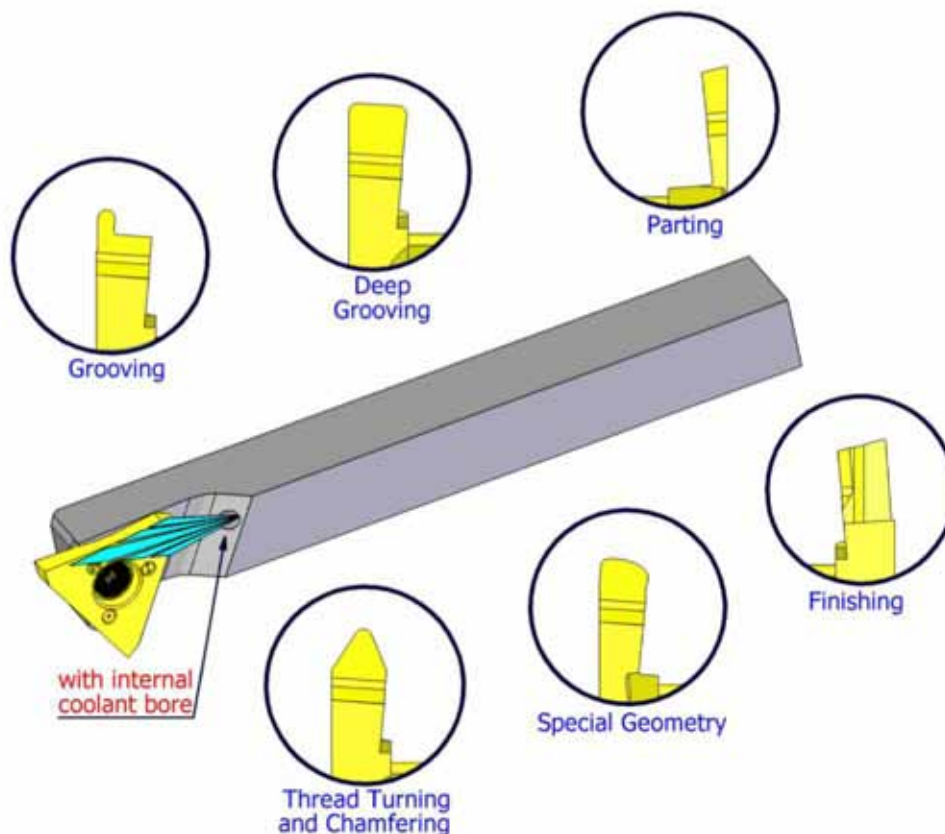


- Three cutting edges.
- The insert can be indexed directly on the machine.
- Internal coolant to the cutting edge.

## Product Identification - Inserts

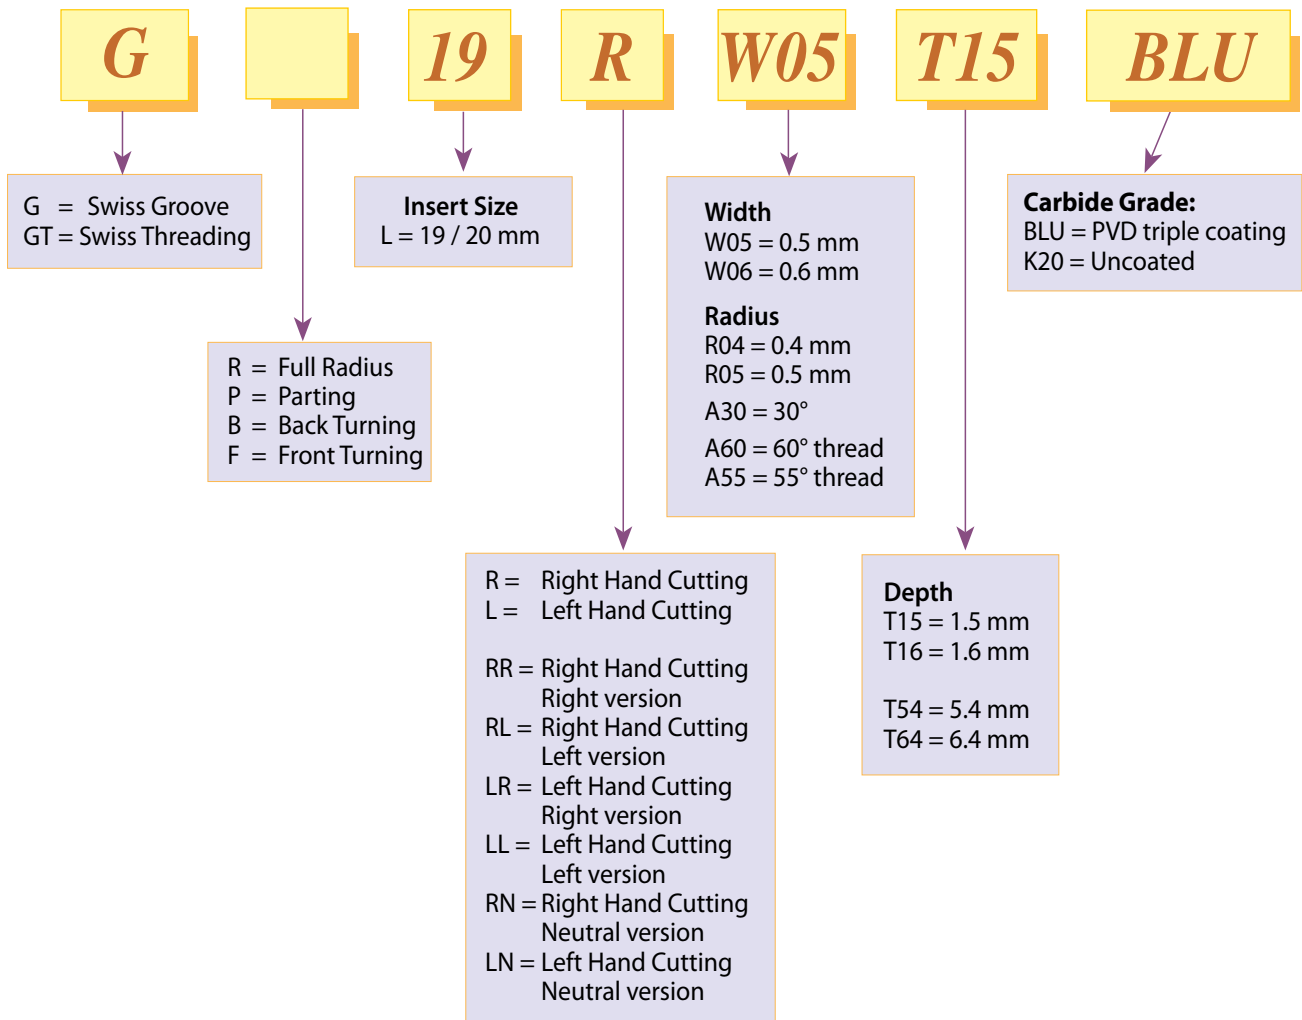

## Grooving

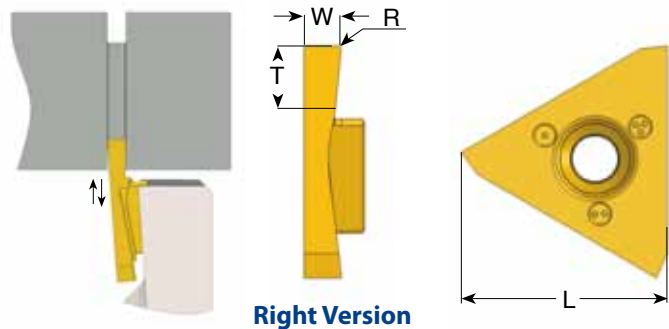


### Right hand cutting

| L  | Ordering Code | W ±0.02 | T max | R    | Feed mm/rev |           |
|----|---------------|---------|-------|------|-------------|-----------|
|    |               |         |       |      | Radial      | Axial     |
| 19 | G19 R W05 T15 | 0.5     | 1.5   | 0    | 0.01-0.06   | 0.02-0.10 |
|    | G19 R W06 T16 | 0.6     | 1.6   | 0    | 0.01-0.06   | 0.02-0.10 |
|    | G19 R W07 T17 | 0.75    | 1.7   | 0    | 0.01-0.06   | 0.02-0.10 |
|    | G19 R W08 T18 | 0.8     | 2.0   | 0.05 | 0.01-0.06   | 0.02-0.10 |
|    | G19 R W10 T22 | 1.0     | 2.5   | 0.05 | 0.02-0.07   | 0.02-0.10 |
|    | G19 R W12 T24 | 1.2     | 3.0   | 0.05 | 0.02-0.07   | 0.02-0.10 |
|    | G19 R W14 T28 | 1.4     | 3.0   | 0.05 | 0.03-0.08   | 0.02-0.10 |
|    | G19 R W15 T30 | 1.5     | 3.0   | 0.05 | 0.03-0.08   | 0.02-0.10 |
| 20 | G19 R W17 T34 | 1.7     | 4.0   | 0.05 | 0.04-0.09   | 0.02-0.20 |
|    | G20 R W20 T40 | 2.0     | 4.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |
|    | G20 R W22 T45 | 2.25    | 5.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |
|    | G20 R W25 T50 | 2.5     | 6.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |
|    | G20 R W30 T60 | 3.0     | 6.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |

### Left hand cutting

| L  | Ordering Code | W ±0.02 | T max | R    | Feed mm/rev |           |
|----|---------------|---------|-------|------|-------------|-----------|
|    |               |         |       |      | Radial      | Axial     |
| 19 | G19 L W05 T15 | 0.5     | 1.5   | 0    | 0.01-0.06   | 0.02-0.10 |
|    | G19 L W06 T16 | 0.6     | 1.6   | 0    | 0.01-0.06   | 0.02-0.10 |
|    | G19 L W07 T17 | 0.75    | 1.7   | 0    | 0.01-0.06   | 0.02-0.10 |
|    | G19 L W08 T18 | 0.8     | 2.0   | 0.05 | 0.01-0.06   | 0.02-0.10 |
|    | G19 L W10 T22 | 1.0     | 2.5   | 0.05 | 0.02-0.07   | 0.02-0.10 |
|    | G19 L W12 T24 | 1.2     | 3.0   | 0.05 | 0.02-0.07   | 0.02-0.10 |
|    | G19 L W14 T28 | 1.4     | 3.0   | 0.05 | 0.03-0.08   | 0.02-0.10 |
|    | G19 L W15 T30 | 1.5     | 3.0   | 0.05 | 0.03-0.08   | 0.02-0.10 |
| 20 | G19 L W17 T34 | 1.7     | 4.0   | 0.05 | 0.04-0.09   | 0.02-0.20 |
|    | G20 L W20 T40 | 2.0     | 4.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |
|    | G20 L W22 T45 | 2.25    | 5.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |
|    | G20 L W25 T50 | 2.5     | 6.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |
|    | G20 L W30 T60 | 3.0     | 6.0   | 0.1  | 0.05-0.10   | 0.02-0.20 |

## Grooving and Profiling (full radius)

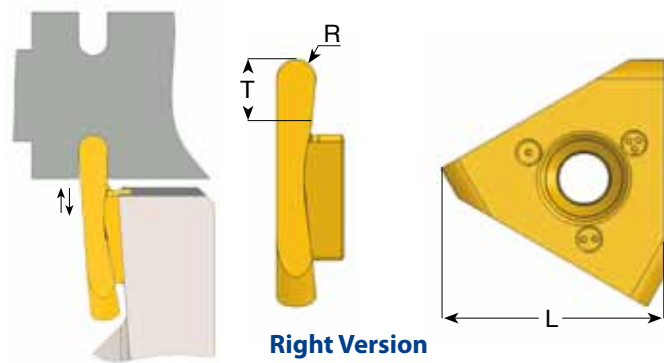


### Right hand cutting

| L  | Ordering Code  | R ±0.03 | T max | Feed mm/rev |           |
|----|----------------|---------|-------|-------------|-----------|
|    |                |         |       | Radial      | Axial     |
| 19 | GR19 R R02 T15 | 0.25    | 1.5   | 0.01-0.06   | 0.02-0.10 |
|    | GR19 R R04 T18 | 0.40    | 2.0   | 0.01-0.06   | 0.02-0.10 |
|    | GR19 R R05 T22 | 0.50    | 2.5   | 0.02-0.07   | 0.02-0.10 |
|    | GR19 R R06 T26 | 0.60    | 3.0   | 0.02-0.07   | 0.02-0.10 |
|    | GR19 R R08 T33 | 0.80    | 3.5   | 0.04-0.09   | 0.02-0.20 |
|    | GR19 R R10 T40 | 1.00    | 4.0   | 0.05-0.10   | 0.02-0.20 |
| 20 | GR20 R R12 T50 | 1.25    | 6.0   | 0.05-0.10   | 0.02-0.20 |
|    | GR20 R R15 T60 | 1.50    | 6.0   | 0.05-0.10   | 0.02-0.20 |

### Left hand cutting

| L  | Ordering Code  | R ±0.03 | T max | Feed mm/rev |           |
|----|----------------|---------|-------|-------------|-----------|
|    |                |         |       | Radial      | Axial     |
| 19 | GR19 L R02 T15 | 0.25    | 1.5   | 0.01-0.06   | 0.02-0.10 |
|    | GR19 L R04 T18 | 0.40    | 2.0   | 0.01-0.06   | 0.02-0.10 |
|    | GR19 L R05 T22 | 0.50    | 2.5   | 0.02-0.07   | 0.02-0.10 |
|    | GR19 L R06 T26 | 0.60    | 3.0   | 0.02-0.07   | 0.02-0.10 |
|    | GR19 L R08 T33 | 0.80    | 3.5   | 0.04-0.09   | 0.02-0.20 |
|    | GR19 L R10 T40 | 1.00    | 4.0   | 0.05-0.10   | 0.02-0.20 |
| 20 | GR20 L R12 T50 | 1.25    | 6.0   | 0.05-0.10   | 0.02-0.20 |
|    | GR20 L R15 T60 | 1.50    | 6.0   | 0.05-0.10   | 0.02-0.20 |

## Parting Off

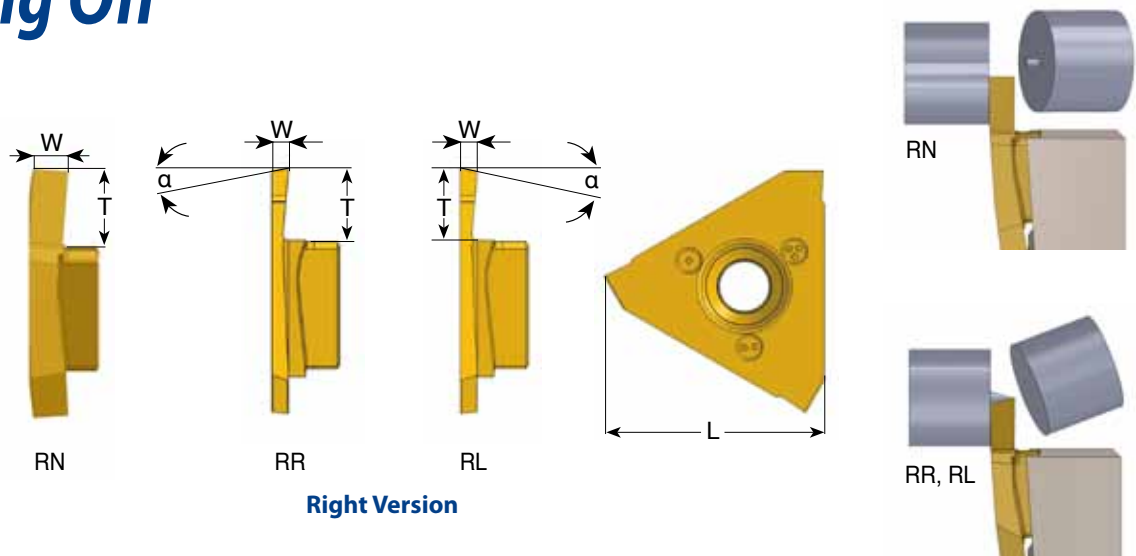


Right Version

### Right hand cutting

| L               | Ordering Code   | W   | $\alpha^\circ$ | T max     | Feed mm/rev<br>Radial |
|-----------------|-----------------|-----|----------------|-----------|-----------------------|
| 19              | GP19 RR W10 T54 | 1.0 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 RL W10 T54 | 1.0 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 RN W10 T54 | 1.0 | 0              | 5.4       | 0.02-0.09             |
|                 | GP19 RR W12 T54 | 1.2 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 RL W12 T54 | 1.2 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 RN W12 T54 | 1.2 | 0              | 5.4       | 0.02-0.09             |
| 20              | GP20 RR W15 T64 | 1.5 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 RL W15 T64 | 1.5 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 RN W15 T64 | 1.5 | 0              | 6.4       | 0.04-0.10             |
|                 | GP20 RR W18 T64 | 1.8 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 RL W18 T64 | 1.8 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 RN W18 T64 | 1.8 | 0              | 6.4       | 0.04-0.10             |
|                 | GP20 RR W20 T64 | 2.0 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 RL W20 T64 | 2.0 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 RN W20 T64 | 2.0 | 0              | 6.4       | 0.05-0.12             |
|                 | GP20 RR W25 T64 | 2.5 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 RL W25 T64 | 2.5 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 RN W25 T64 | 2.5 | 0              | 6.4       | 0.05-0.12             |
|                 | GP20 RR W30 T64 | 3.0 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 RL W30 T64 | 3.0 | 15             | 6.4       | 0.05-0.12             |
| GP20 RN W30 T64 | 3.0             | 0   | 6.4            | 0.05-0.12 |                       |

## Parting Off

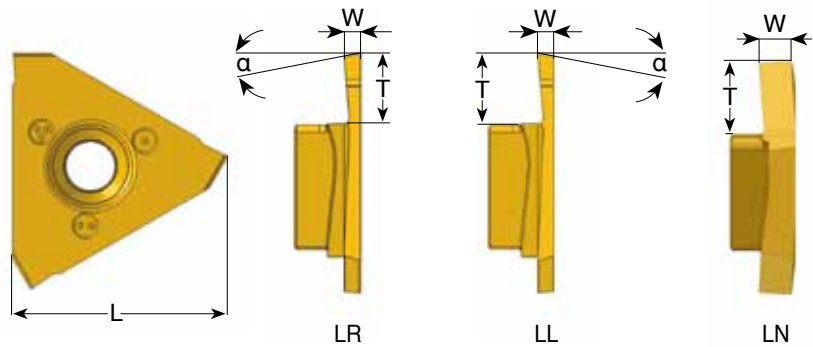


Left Version

### Left hand cutting

| L               | Ordering Code   | W   | $\alpha^\circ$ | T max     | Feed mm/rev<br>Radial |
|-----------------|-----------------|-----|----------------|-----------|-----------------------|
| 19              | GP19 LR W10 T54 | 1.0 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 LL W10 T54 | 1.0 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 LN W10 T54 | 1.0 | 0              | 5.4       | 0.02-0.09             |
|                 | GP19 LR W12 T54 | 1.2 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 LL W12 T54 | 1.2 | 15             | 5.4       | 0.02-0.09             |
|                 | GP19 LN W12 T54 | 1.2 | 0              | 5.4       | 0.02-0.09             |
| 20              | GP20 LR W15 T64 | 1.5 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 LL W15 T64 | 1.5 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 LN W15 T64 | 1.5 | 0              | 6.4       | 0.04-0.10             |
|                 | GP20 LR W18 T64 | 1.8 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 LL W18 T64 | 1.8 | 15             | 6.4       | 0.04-0.10             |
|                 | GP20 LN W18 T64 | 1.8 | 0              | 6.4       | 0.04-0.10             |
|                 | GP20 LR W20 T64 | 2.0 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 LL W20 T64 | 2.0 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 LN W20 T64 | 2.0 | 0              | 6.4       | 0.05-0.12             |
|                 | GP20 LR W25 T64 | 2.5 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 LL W25 T64 | 2.5 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 LN W25 T64 | 2.5 | 0              | 6.4       | 0.05-0.12             |
|                 | GP20 LR W30 T64 | 3.0 | 15             | 6.4       | 0.05-0.12             |
|                 | GP20 LL W30 T64 | 3.0 | 15             | 6.4       | 0.05-0.12             |
| GP20 LN W30 T64 | 3.0             | 0   | 6.4            | 0.05-0.12 |                       |

## Back Turning

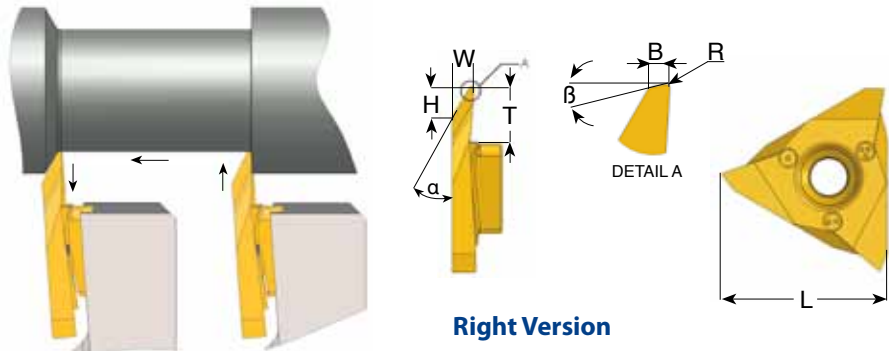

### Right hand cutting

| L  | Ordering Code     | $\alpha^\circ$ | $\beta^\circ$ | R   | W   | H   | B   | T   | Feed mm/rev |
|----|-------------------|----------------|---------------|-----|-----|-----|-----|-----|-------------|
| 19 | <b>GB19 R A30</b> | 30             | 12            | 0.1 | 3.4 | 4.3 | 0.5 | 5.4 | 0.05-0.15   |
| 20 | <b>GB20 R A30</b> | 30             | 12            | 0.1 | 3.4 | 4.3 | 0.5 | 6.4 | 0.05-0.15   |


### Left hand cutting

| L  | Ordering Code     | $\alpha^\circ$ | $\beta^\circ$ | R   | W   | H   | B   | T   | Feed mm/rev |
|----|-------------------|----------------|---------------|-----|-----|-----|-----|-----|-------------|
| 19 | <b>GB19 L A30</b> | 30             | 12            | 0.1 | 3.4 | 4.3 | 0.5 | 5.4 | 0.05-0.15   |
| 20 | <b>GB20 L A30</b> | 30             | 12            | 0.1 | 3.4 | 4.3 | 0.5 | 6.4 | 0.05-0.15   |

## Front Turning

### Right hand cutting

| L  | Ordering Code     | T   | Feed mm/rev |
|----|-------------------|-----|-------------|
| 19 | <b>GF19 R T54</b> | 5.4 | 0.05-0.15   |
| 20 | <b>GF20 R T64</b> | 6.4 | 0.05-0.15   |

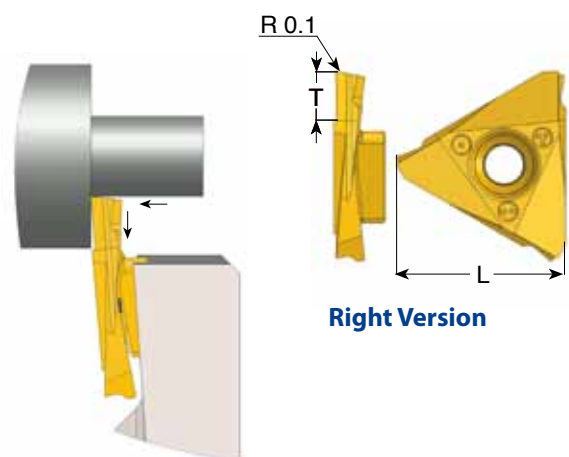


### Left hand cutting

| L  | Ordering Code     | T   | Feed mm/rev |
|----|-------------------|-----|-------------|
| 19 | <b>GF19 L T54</b> | 5.4 | 0.05-0.15   |
| 20 | <b>GF20 L T64</b> | 6.4 | 0.05-0.15   |



## Threading - Partial Profile 60° External Thread

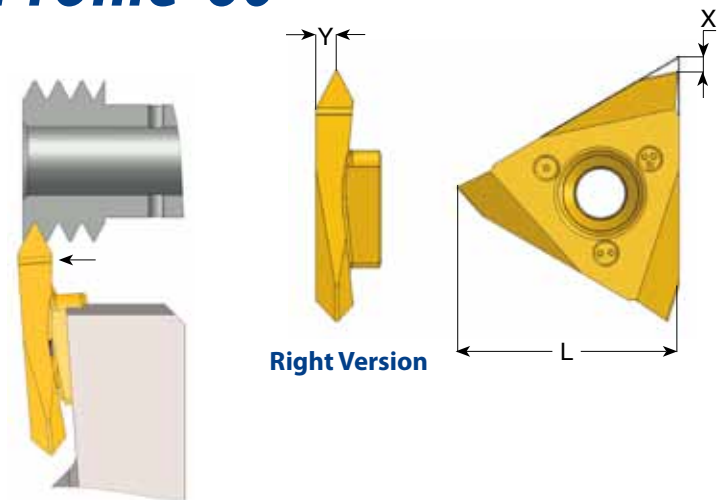


### Right hand cutting

| L  | mm       | TPI   | Ordering Code      | X   | Y   |
|----|----------|-------|--------------------|-----|-----|
| 19 | 0.5-1.5  | 48-16 | <b>GT19 R A60</b>  | 2.8 | 1.1 |
|    | 1.75-3.0 | 14-8  | <b>GT19 R G60</b>  | 2.8 | 1.7 |
|    | 0.5-3.0  | 48-8  | <b>GT19 R AG60</b> | 2.8 | 1.7 |

### Left hand cutting

| L  | mm       | TPI   | Ordering Code      | X   | Y   |
|----|----------|-------|--------------------|-----|-----|
| 19 | 0.5-1.5  | 48-16 | <b>GT19 L A60</b>  | 2.8 | 1.1 |
|    | 1.75-3.0 | 14-8  | <b>GT19 L G60</b>  | 2.8 | 1.7 |
|    | 0.5-3.0  | 48-8  | <b>GT19 L AG60</b> | 2.8 | 1.7 |

## Threading - Partial Profile 55° External Thread

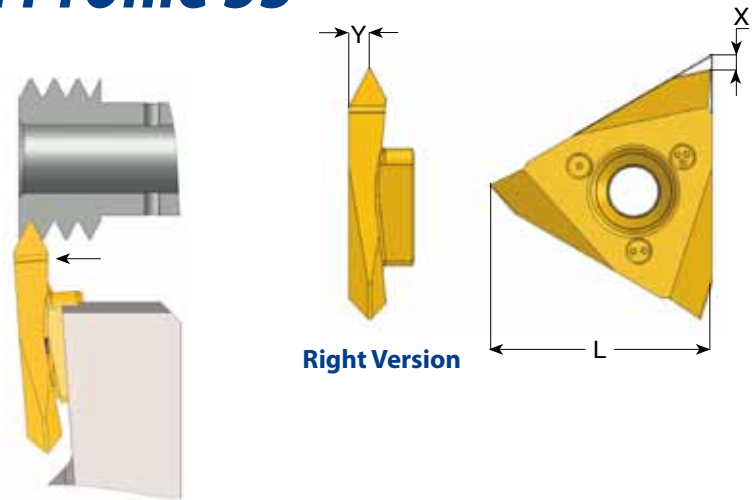


### Right hand cutting

| L  | mm       | TPI   | Ordering Code      | X   | Y   |
|----|----------|-------|--------------------|-----|-----|
| 19 | 0.5-1.5  | 48-16 | <b>GT19 R A55</b>  | 2.8 | 1.0 |
|    | 1.75-3.0 | 14-8  | <b>GT19 R G55</b>  | 2.8 | 1.7 |
|    | 0.5-3.0  | 48-8  | <b>GT19 R AG55</b> | 2.8 | 1.7 |

### Left hand cutting

| L  | mm       | TPI   | Ordering Code      | X   | Y   |
|----|----------|-------|--------------------|-----|-----|
| 19 | 0.5-1.5  | 48-16 | <b>GT19 L A55</b>  | 2.8 | 1.0 |
|    | 1.75-3.0 | 14-8  | <b>GT19 L G55</b>  | 2.8 | 1.7 |
|    | 0.5-3.0  | 48-8  | <b>GT19 L AG55</b> | 2.8 | 1.7 |

## Threading - ISO metric 60° External Thread

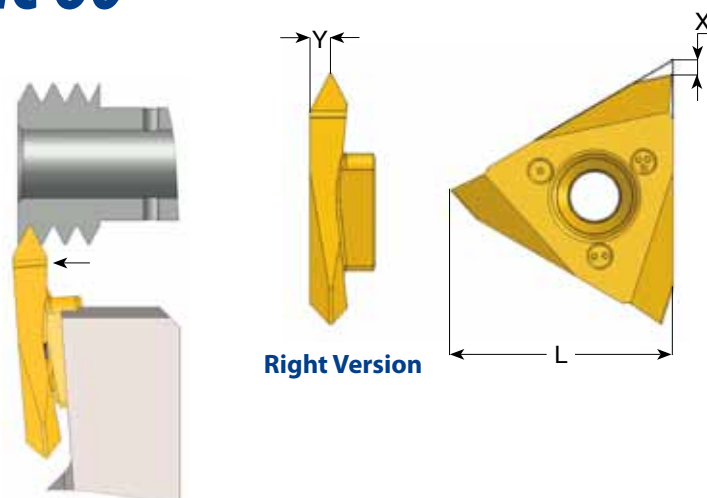

Right Version

### Right hand cutting


| L  | mm   | Ordering Code   | X   | Y   |
|----|------|-----------------|-----|-----|
| 19 | 0.5  | GT19 R 0.5 ISO  | 2.8 | 0.6 |
|    | 0.7  | GT19 R 0.7 ISO  | 2.8 | 0.7 |
|    | 0.75 | GT19 R 0.75 ISO | 2.8 | 0.7 |
|    | 0.8  | GT19 R 0.8 ISO  | 2.8 | 0.7 |
|    | 1.0  | GT19 R 1.0 ISO  | 2.8 | 0.8 |
|    | 1.25 | GT19 R 1.25 ISO | 2.8 | 1.0 |
|    | 1.5  | GT19 R 1.5 ISO  | 2.8 | 1.1 |
|    | 1.75 | GT19 R 1.75 ISO | 2.8 | 1.3 |

### Left hand cutting

| L  | mm   | Ordering Code   | X   | Y   |
|----|------|-----------------|-----|-----|
| 19 | 0.5  | GT19 L 0.5 ISO  | 2.8 | 0.6 |
|    | 0.7  | GT19 L 0.7 ISO  | 2.8 | 0.7 |
|    | 0.75 | GT19 L 0.75 ISO | 2.8 | 0.7 |
|    | 0.8  | GT19 L 0.8 ISO  | 2.8 | 0.7 |
|    | 1.0  | GT19 L 1.0 ISO  | 2.8 | 0.8 |
|    | 1.25 | GT19 L 1.25 ISO | 2.8 | 1.0 |
|    | 1.5  | GT19 L 1.5 ISO  | 2.8 | 1.1 |
|    | 1.75 | GT19 L 1.75 ISO | 2.8 | 1.3 |

# Threading - UN unified 60°

## External Thread

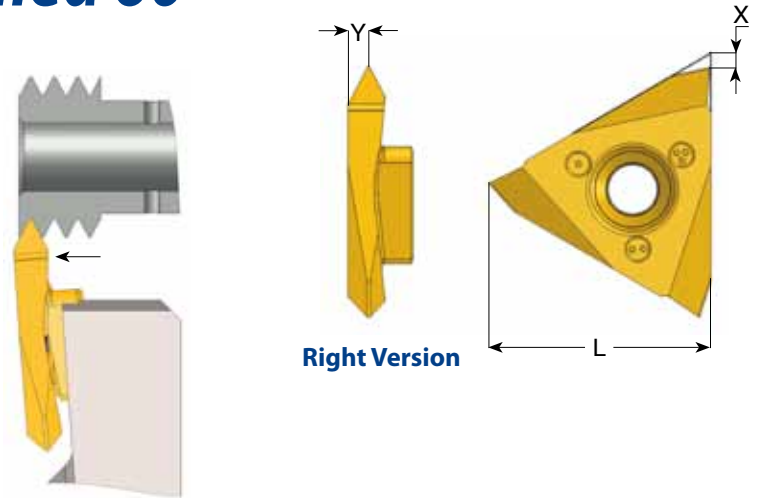
**Right Version**


### Right hand cutting

| L  | TPI | Ordering Code      | X   | Y   |
|----|-----|--------------------|-----|-----|
| 19 | 72  | <b>GT19 R 72UN</b> | 2.8 | 0.4 |
|    | 56  | <b>GT19 R 56UN</b> | 2.8 | 0.6 |
|    | 40  | <b>GT19 R 40UN</b> | 2.8 | 0.7 |
|    | 32  | <b>GT19 R 32UN</b> | 2.8 | 0.7 |
|    | 24  | <b>GT19 R 24UN</b> | 2.8 | 0.8 |
|    | 20  | <b>GT19 R 20UN</b> | 2.8 | 1.0 |

### Left hand cutting


| L  | TPI | Ordering Code      | X   | Y   |
|----|-----|--------------------|-----|-----|
| 19 | 72  | <b>GT19 L 72UN</b> | 2.8 | 0.4 |
|    | 56  | <b>GT19 L 56UN</b> | 2.8 | 0.6 |
|    | 40  | <b>GT19 L 40UN</b> | 2.8 | 0.7 |
|    | 32  | <b>GT19 L 32UN</b> | 2.8 | 0.7 |
|    | 24  | <b>GT19 L 24UN</b> | 2.8 | 0.8 |
|    | 20  | <b>GT19 L 20UN</b> | 2.8 | 1.0 |

## Product Identification - Toolholders

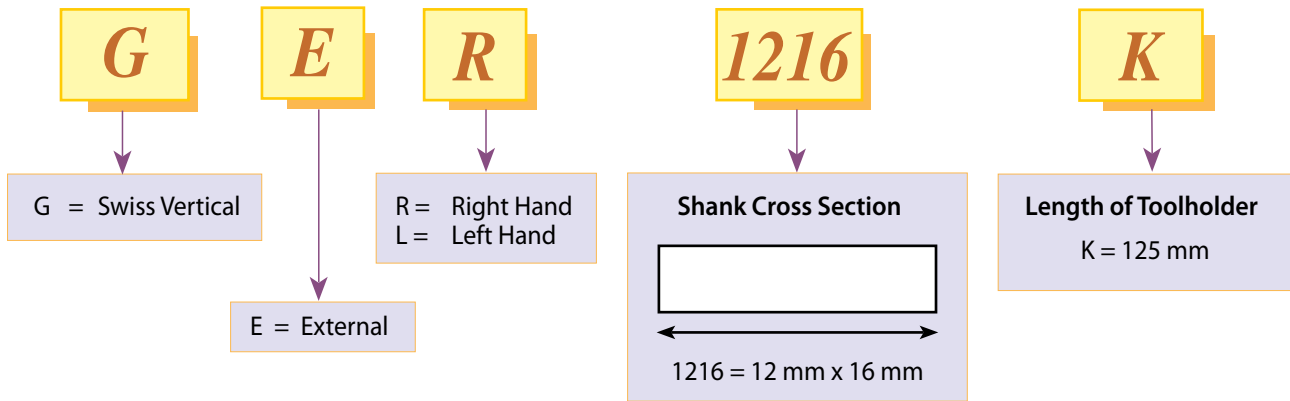

## External Toolholders

- Coolant through toolholders, for external turning in Swiss style lathes.
- The high pressure coolant is directed towards the insert cutting edge in order to evacuate the chips created and avoid build up edge.
- Including a coolant connector for a quick setup on the machine.

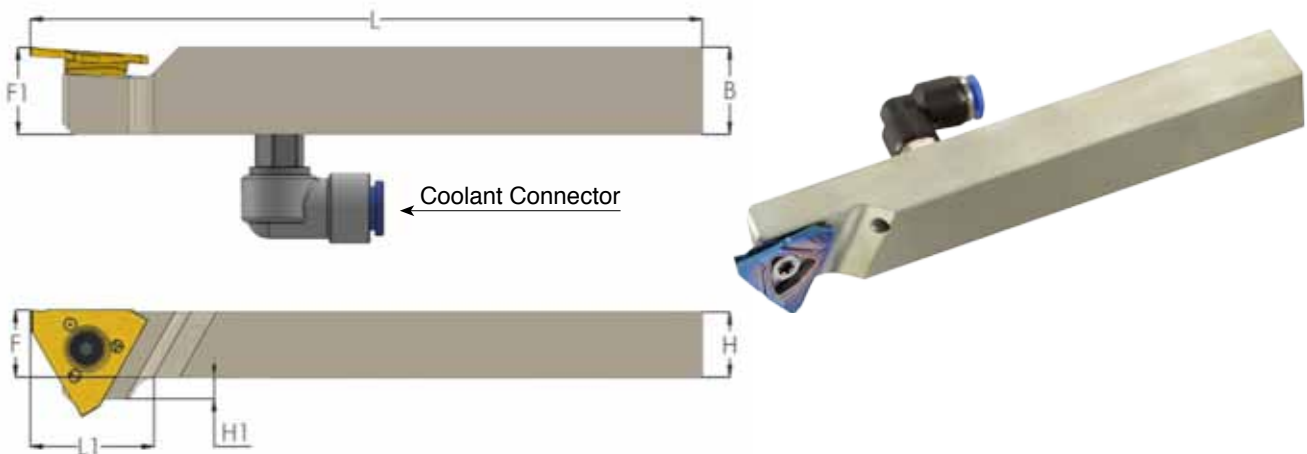

## Right hand

| Ordering Code | B  | H  | L1 | L   | F  | F1 | H1 | Insert Screw | Torx Key | *Coolant connector |
|---------------|----|----|----|-----|----|----|----|--------------|----------|--------------------|
| ** GER 0816 K | 16 | 8  | 17 | 125 | 8  | 16 | 8  | S21          | K21      | -                  |
| GER 1016 K    | 16 | 10 | 17 | 125 | 10 | 16 | 6  | S21          | K21      | Ø4 / Ø6            |
| GER 1216 K    | 16 | 12 | 17 | 125 | 12 | 16 | 4  | S21          | K21      | Ø4 / Ø6            |
| GER 1616 K    | 16 | 16 | -  | 125 | 16 | 16 | 0  | S21          | K21      | Ø4 / Ø6            |
| GER 2020 K    | 20 | 20 | -  | 125 | 20 | 20 | 0  | S21          | K21      | Ø4 / Ø6            |
| GER 2525 M    | 25 | 25 | -  | 150 | 25 | 25 | 0  | S21          | K21      | Ø4 / Ø6            |

\* Diameter of coolant pipe

\*\* Without coolant


## Left hand

| Ordering Code | B  | H  | L1 | L   | F  | F1 | H1 | Insert Screw | Torx Key | *Coolant connector |
|---------------|----|----|----|-----|----|----|----|--------------|----------|--------------------|
| ** GEL 0816 K | 16 | 8  | 17 | 125 | 8  | 16 | 8  | S21          | K21      | -                  |
| GEL 1016 K    | 16 | 10 | 17 | 125 | 10 | 16 | 6  | S21          | K21      | Ø4 / Ø6            |
| GEL 1216 K    | 16 | 12 | 17 | 125 | 12 | 16 | 4  | S21          | K21      | Ø4 / Ø6            |
| GEL 1616 K    | 16 | 16 | -  | 125 | 16 | 16 | 0  | S21          | K21      | Ø4 / Ø6            |
| GEL 2020 K    | 20 | 20 | -  | 125 | 20 | 20 | 0  | S21          | K21      | Ø4 / Ø6            |
| GEL 2525 M    | 25 | 25 | -  | 150 | 25 | 25 | 0  | S21          | K21      | Ø4 / Ø6            |

\* Diameter of coolant pipe

\*\* Without coolant

# Grooving - Parting Off - Turning - Profiling - Threading Working Method

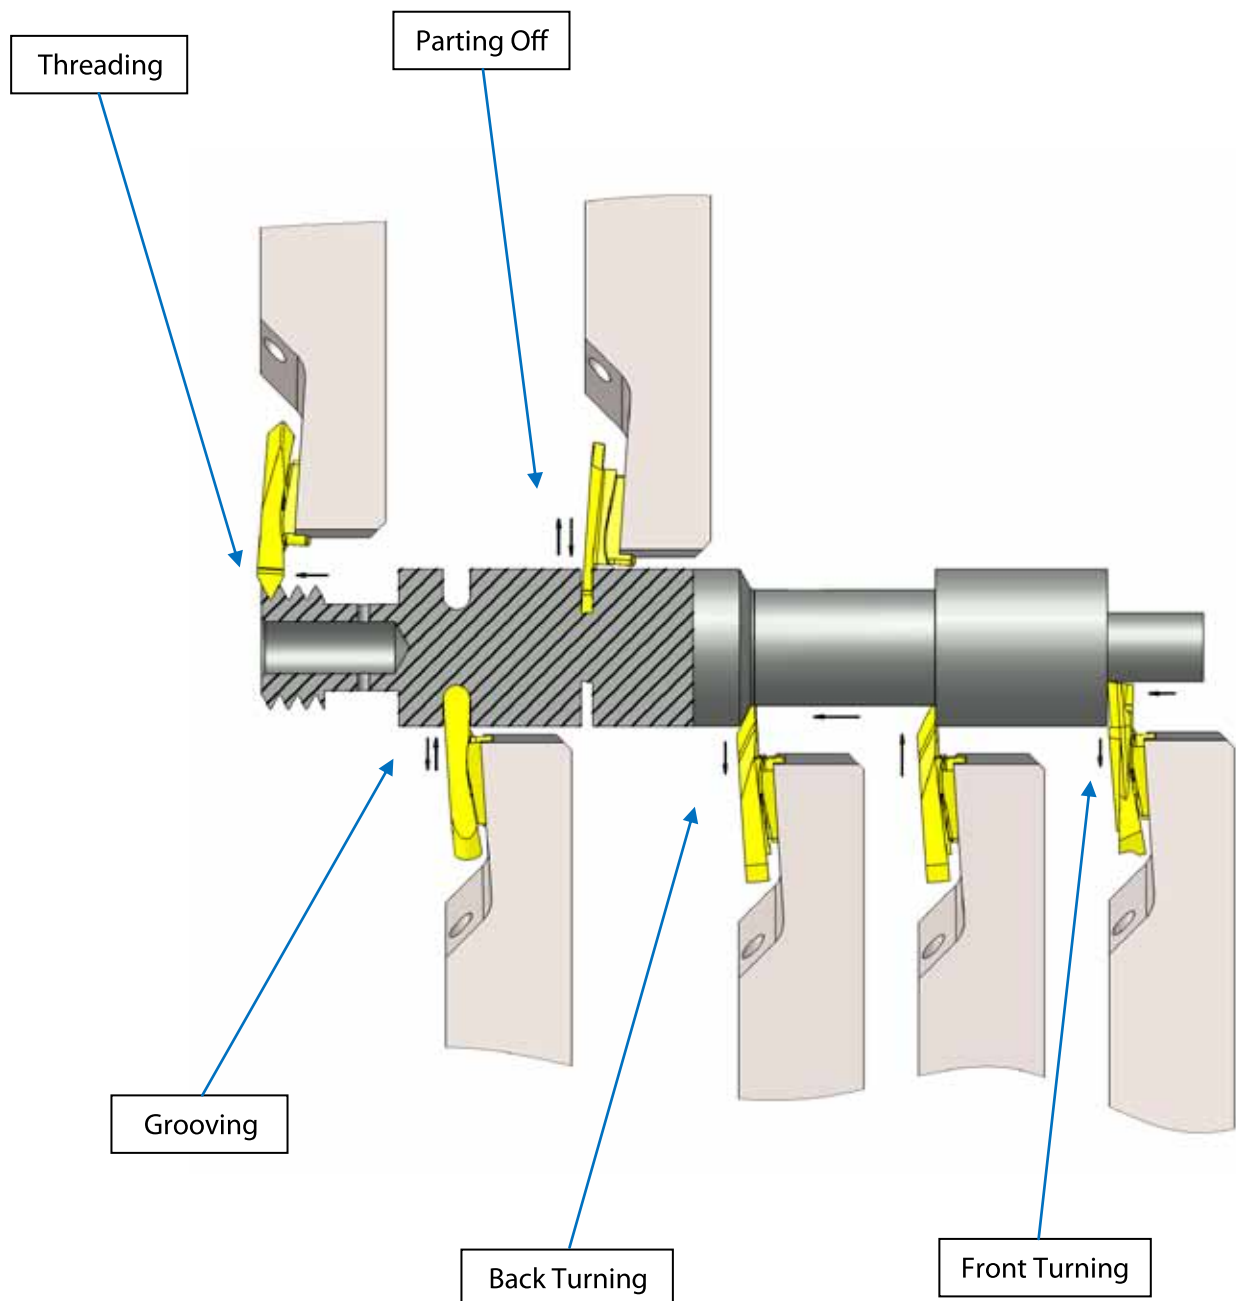

# Carbide Grades

## BLU

PVD triple layer coated Sub-Micron grade for Steel, Stainless Steels, Titanium and hard materials.

## K20

Uncoated Sub-Micron carbide grade for Aluminum and non-ferrous materials, Stainless Steels and Titanium.

| ISO Standard | Materials                                | Cutting Speed m/min |        |
|--------------|--|---------------------|--------|
|              |  | K20                 | BLU    |
| <b>P</b>     | Low & Medium Carbon Steels <0.55%C       | -                   | 80-150 |
|              | High Carbon Steels ≥0.55%C               | -                   | 70-120 |
|              | Alloy Steels, Treated Steels             | -                   | 40- 80 |
| <b>M</b>     | Stainless Steel-Free Cutting             | 30- 80              | 60-120 |
|              | Stainless Steel-Austenitic               | 20- 70              | 30- 90 |
|              | Cast Steels                              | 30- 80              | 50-120 |
| <b>K</b>     | Cast Iron                                | 50-120              | -      |
| <b>N</b>     | Aluminum ≤12%Si, Copper                  | 120-250             | -      |
|              | Aluminum >12%Si                          | 90-200              | -      |
|              | Synthetics, Duroplastics, Thermoplastics | 70-150              | -      |
| <b>S</b>     | Nickel Alloys, Titanium Alloys           | 20- 50              | 30- 70 |
| <b>H</b>     | Hardened Steel, 45-50HRc                 | -                   | 20- 50 |