

TW

MG

0.6 μm

15°


4 Flutes

5 Flutes

HRc ▶ 52

G10

螺紋銑刀 Thread Milling

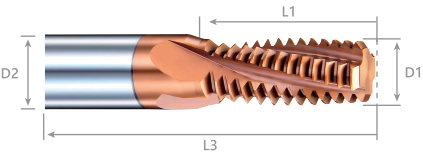

型號 Type NO.	直徑 D1	刃數 ZN	刃長 L1	全長 L3	柄徑 D2	螺距 Pitch	螺牙 M
TW02305M3050	2.3	3	5.20	40	6	0.50	M3
TW02307M3050	2.3	3	7.20	40	6	0.50	M3
TW03007M4070	3.0	3	7.28	40	6	0.70	M4
TW03010M4070	3.0	3	10.08	40	6	0.70	M4
TW03809M5080	3.8	3	9.12	50	6	0.80	M5
TW03812M5080	3.8	3	12.32	50	6	0.80	M5
TW04511M6100	4.5	3	10.40	60	6	1.00	M6
TW04515M6100	4.5	3	14.40	60	6	1.00	M6
TW06014M8125	6.0	3	14.25	60	8	1.25	M8
TW06019M8125	6.0	3	19.25	60	8	1.25	M8
TW07517M10150	7.5	3	17.10	60	8	1.50	M10
TW07525M10150	7.5	3	24.60	75	8	1.50	M10
TW08020M12175	8.0	3	19.95	60	8	1.75	M12
TW08029M12175	8.0	3	28.70	75	8	1.75	M12
TW09020M12175	9.0	4	19.95	75	10	1.75	M12
TW09029M12175	9.0	4	28.70	75	10	1.75	M12
TW10027M14200	10.0	4	26.80	75	10	2.00	M14
TW10039M14200	10.0	4	38.80	100	10	2.00	M14
TW12027M16200	12.0	4	26.80	80	12	2.00	M16
TW12039M16200	12.0	4	38.80	100	12	2.00	M16
TW12031M18250	12.0	4	31.00	100	12	2.50	M18
TW12045M18250	12.0	4	43.50	100	12	2.50	M18
TW14034M20250	14.0	4	33.50	100	14	2.50	M20
TW14049M20250	14.0	4	48.50	100	14	2.50	M20
TW16041M24300	16.0	5	40.20	100	16	3.00	M24
TW16059M24300	16.0	5	58.20	120	16	3.00	M24

HW

Super MG

0.2 μm


15°

4 Flutes

HRc ▶ 62

G12

高硬度用螺紋銑刀 Thread Milling

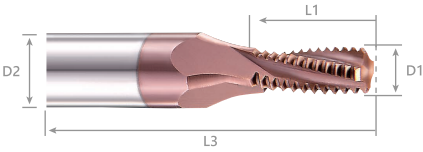

型號 Type NO.	直徑 D1	刃數 ZN	刃長 L1	全長 L3	柄徑 D2	螺距 Pitch	M 螺牙適用規格 Applicable Size	
							粗牙 Coarse	細牙 Fine
HW0230505	2.3	4	5.20	40	6	0.5	M3	≥M4
HW0230705	2.3	4	7.20	40	6	0.5	M3	≥M4
HW0300707	3.0	4	7.28	40	6	0.7	M4	
HW0301007	3.0	4	10.08	40	6	0.7	M4	
HW0380908	3.8	4	9.12	50	6	0.8	M5	
HW0381208	3.8	4	12.32	50	6	0.8	M5	
HW0451110	4.5	4	10.40	60	6	1.0	M6	≥M8
HW0451510	4.5	4	14.40	60	6	1.0	M6	≥M8
HW06014125	6.0	4	14.25	60	6	1.25	M8	≥M10
HW06019125	6.0	4	19.25	60	6	1.25	M8	≥M10